

#### CND TEPPANYAKI GRILL TABLE SPECIFICATIONS

models/sizes:

TS-90 | Ø 90 cm x 73 cm H

TS-120 | Ø 120 cm x 73 cm H

~346 sq/inch HOT cooking center incl. warming

#### INDOOR + OUTDOOR USE | IPX4 RATED

Material: Professional Food Grade Best Alloy  
German Stainless Steel type 304 (V2A)  
5/32" thick (4 mm) cold pressed, hand-welded.  
Built-to-last. Elegant silk-brushed finish.

Power: **2250 Watt | 240V | 10 AMP**

Electric:

Analog infinitely variable temperature control:  
1-10 dial | 2 indicator lights | thermostat

**Contact Heat:** 55° to 230°C

#### 2 Year Manufacturer Warranty

VDE issued CE/GS European Safety Approval.

Electrical + Electronic

Components: UL approved.



Custom sizes on request.

Shipping Weight per skid/ea:

TS-35: 56.7 kg

TS-47: 95.5 kg



- 1 COLD DINING AREA
- 2 HOT COOKING CENTER
- 3 POWER CORD RECEPTACLE at rear of control box
- 4 INDICATOR LIGHTS control box




Manufacturer reserves the right to alter, update or discontinue any model without further notice.



Stainless steel production uses up to 80% recycled raw material



bechtold SINCE 1966 - OVER 50 YEARS OF INNOVATION IN STEEL & PRECISION MANUFACTURING

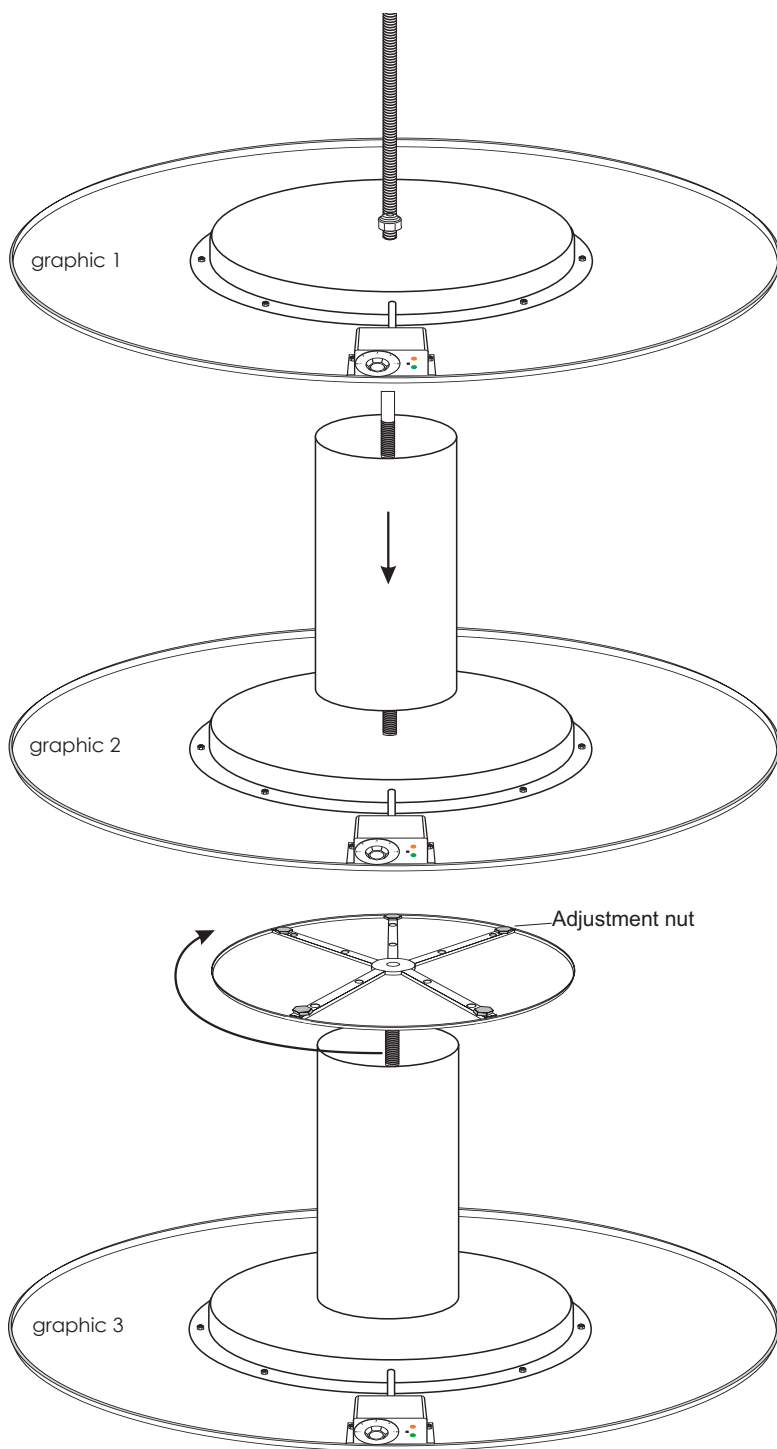

**Step 1:** Open the box/remove lid. Tabletop is laying bottom up in the box. Remove packaging from threaded rod (packed separately).

Leave tabletop in the box to protect the surface from scratching during assembly.

If provided, place metal plate on top of the heating element enclosure and align the holes. Insert the threaded rod (nut down) into the designated centered hole. Turn the rod clockwise until hand-tight and nut is flush with the heating element. Do not use power tools! (graphic 1).

**Step 2:** Slide the stand (tube) over the threaded rod, guiding the rod carefully through the designated holes in each inner brackets at either end of the stand/tube. (graphic 2)

**Step 3:** Turn the pedestal disk upside down, position the designated hole on top of the threaded rod. Turn pedestal clockwise while supporting it with your hands until it is firmly connected with the stand and the top of the table.

**Step 4:** Turn the now fully assembled table to its upright position and level it by rising or lowering the respective adjustment nuts at the underside of the pedestal disk. Check voltage label. Now connect the power cord to table and then to respective three prong grounded power outlet.

**PATENTED SHALLOW-DIP-TECHNOLOGY + CONTACT HEAT**

**2 Year  
Manufacturer Warranty**  
CE/ GS/ VDE European Safety  
Certifications



Electrical + electronic  
Components: UL approved.

**INDOOR + OUTDOOR IPX4 RATED**

Material:  
Professional Food Grade Premium  
German Stainless Steel type 304  
8-10 gauge | 1/8" - 5/32" | 4-5 mm thick  
Cold pressed + hand-welded  
Silk-brushed Finish.

Power: **2250 Watt | 240V | 10 AMP**  
Electric:

**Contact Heat:**

**65°-220°C**

Analog Temperature Control:  
1-10 dial with thermostat  
2 LED control lights  
Touch-Sensor Controls  
coming soon.

10 ft. POWER CABLE

STANDARD 3-PRONG  
GROUNDED PLUG

**BUILT-IN  
UNITS:  
components 1 - 6 ONLY**

